



L1648T

JON BOAT SERIES SPECIFICATIONS

	L1032	L1232	L1236	L1436	L1436L	L1440M	L1448	L1448T	L1448M	L1448MT	L1648	L1648T	L1648M	L1648MT	L1652MT	L1852MT
LENGTH	10'	11' 10"	11' 11"	14'	14'	14'	14'	14'	14'	14'	15' 10"	15' 10"	15' 10"	15' 10"	15' 10"	18'
	3.04m	3.60m	3.63m	4.27m	4.27m	4.27m	4.27m	4.27m	4.27m	4.27m	4.82m	4.82m	4.82m	4.82m	4.82m	5.48m
BEAM	48"	48"	56"	57"	57"	59"	70"	70"	70"	70"	70"	70"	70"	70"	75"	75"
	1.21m	1.21m	1.42m	1.45m	1.45m	1.49m	1.77m	1.77m	1.77m	1.77m	1.77m	1.77m	1.77m	1.77m	1.91m	1.91m
SIDE DEPTH	16"	16"	17"	17"	17"	19"	19"	19"	21"	21"	21"	21"	21"	21"	21"	21"
	.41m	.41m	.43m	.43m	.43m	.48m	.48m	.48m	.53m	.53m	.53m	.53m	.53m	.53m	.53m	.53m
BOTTOM WIDTH	32"	32"	36"	36"	36"	40"	48"	48"	48"	48"	48"	48"	48"	48"	52"	52"
	.81m	.81m	.91m	.91m	.91m	1.01m	1.2m	1.2m	1.2m	1.2m	1.2m	1.2m	1.2m	1.2m	1.32m	1.32m
TRANSOM HEIGHT	15"	15"	15"	15"	15"	15"	15"	15"	20"	20"	15"	20"	20"	20"	20"	20"
	.38m	.38m	.38m	.38m	.38m	.38m	.38m	.38m	.5m	.5m	.38m	.5m	.5m	.5m	.5m	.5m
RIBS	2	3	6	8	8	8	7	7	7	7	9	9	9	9	9	10
APPROX. HULL WT.	80 lb	90 lb	140 lb	145 lb	145 lb	205 lb	260 lb	260 lb	260 lb	260 lb	275 lb	275 lb	275 lb	275 lb	450 lb	475 lb
	36 kg	40 kg	239 kg	66 kg	66 kg	92 kg	117 kg	117 kg	117 kg	117 kg	125 kg	125 kg	125 kg	125 kg	204 kg	215 kg
MAX. WT. CAP.	275 lb	335 lb	527 lb	675 lb	552 lb	780 lb	825 lb	825 lb	825 lb	825 lb	973 lb	973 lb	973 lb	973 lb	1216 lb	1375 lb
	124 kg	151 kg	239 kg	306 kg	250 kg	354 kg	374 kg	374 kg	374 kg	374 kg	441 kg	441 kg	441 kg	441 kg	552 kg	624 kg
MAX. HP CAPACITY	3 hp	3 hp	10 hp	20 hp	15 hp	20 hp	25 hp	25 hp	25 hp	25 hp	35 hp	35 hp	35 hp	35 hp	50/35 hp*	65/45 hp*
	2 kw	2 kw	7.5 kw	15 kw	11 kw	15 kw	19 kw	19 kw	19 kw	19 kw	26 kw	26 kw	26 kw	26 kw	37/26 kw	48/34 kw
MAX. PERSON WT. CAP.	180 lb	295 lb	325 lb	350 lb	350 lb	455 lb	500 lb	500 lb	500 lb	500 lb	555 lb	555 lb	555 lb	555 lb	715 lb	815 lb
	82 kg	133 kg	147 kg	159 kg	159 kg	206 kg	227 kg	227 kg	227 kg	227 kg	252 kg	252 kg	252 kg	252 kg	324 kg	370 kg
HULL GAUGE	.050"	.050"	.050"	.064"	.050"	.064"	.072"	.072"	.072"	.072"	.072"	.072"	.072"	.072"	.072"	.072"
	1.27mm	1.27mm	1.27mm	1.63mm	1.27mm	1.63mm	1.83mm	1.83mm	1.83mm	1.83mm	1.83mm	1.83mm	1.83mm	1.83mm	1.83mm	1.83mm

* Remote or Tiller

ANGLER UTILITY-V SERIES SPECIFICATIONS

	A1257	A1457	A1467	A1467WT	A1667	A1667WT
LENGTH	12' 1"	13' 11"	13' 11"	13' 11"	16'	16'
	3.68m	4.24m	4.24m	4.24m	4.88m	4.88m
BEAM	57"	57"	67"	67"	67"	67"
	1.45m	1.45m	1.70m	1.70m	1.70m	1.70m
BOW HEIGHT	27"	27.5"	27"	27"	27"	27"
	.69m	.70m	.69m	.69m	.69m	.69m
TRANSOM HEIGHT	15"	15"	20"	20"	20"	20"
	.38m	.38m	.5m	.5m	.5m	.5m
RIBS	7	7	12	12	14	14
APPROX. HULL WT.	128 lb	144 lb	235 lb	377 lb	275 lb	440 lb
	58 kg	65 kg	107 kg	171 kg	125 kg	200 kg
MAX. WT. CAP.	602 lb	702 lb	985 lb	1,058 lb	1,153 lb	1,153 lb
	273 kg	318 kg	447 kg	480 kg	522 kg	522 kg
MAX. HP CAP.	10 hp	10 hp	25/15 hp*	25/15 hp*	25/15 hp*	25/15 hp*
	7 kw	7 kw	19/11 kw	19/11 kw	19/11 kw	19/11 kw
MAX. PERSON WT. CAP.	400 lb	500 lb	660 lb	640 lb	735 lb	735 lb
	181 kg	227 kg	299 kg	290 kg	333 kg	333 kg
HULL GAUGE	.050"	.050"	.072"	.072"	.072"	.072"
	1.2mm	1.2mm	1.8mm	1.8mm	1.8mm	1.8mm

* Tiller Model



A1467WT

JONS

L1032
Length: 10'
Beam: 48"



L1232
Length: 11' 10"
Beam: 48"



L1236
Length: 11' 11"
Beam: 56"



L1436
Length: 14'
Beam: 57"



L1436L
Length: 14'
Beam: 57"




L1440M
Length: 14'
Beam: 59"



L1448/T
Length: 14'
Beam: 70"



L1448M/MT
Length: 14'
Beam: 70"

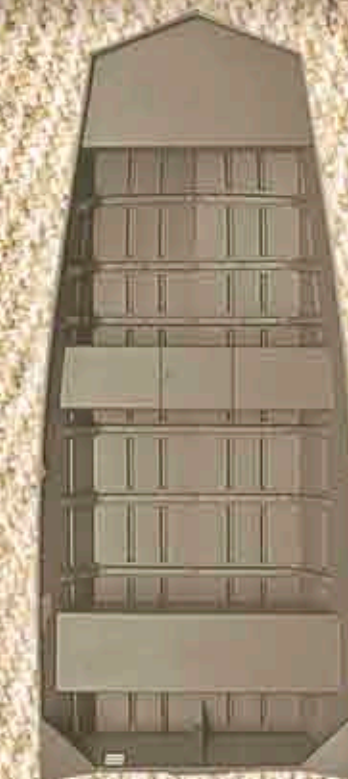

L1648/T
Length: 15' 10"
Beam: 70"



L1648M/MT
Length: 15' 10"
Beam: 70"



L1652MT
Length: 15' 10"
Beam: 75"



L1852MT
Length: 18'
Beam: 75"



ANGLERS

A1257
Length: 12' 1"
Beam: 57"




A1457
Length: 13' 11"
Beam: 57"



A1467
Length: 13' 11"
Beam: 67"



A1467WT
Length: 13' 11"
Beam: 67"

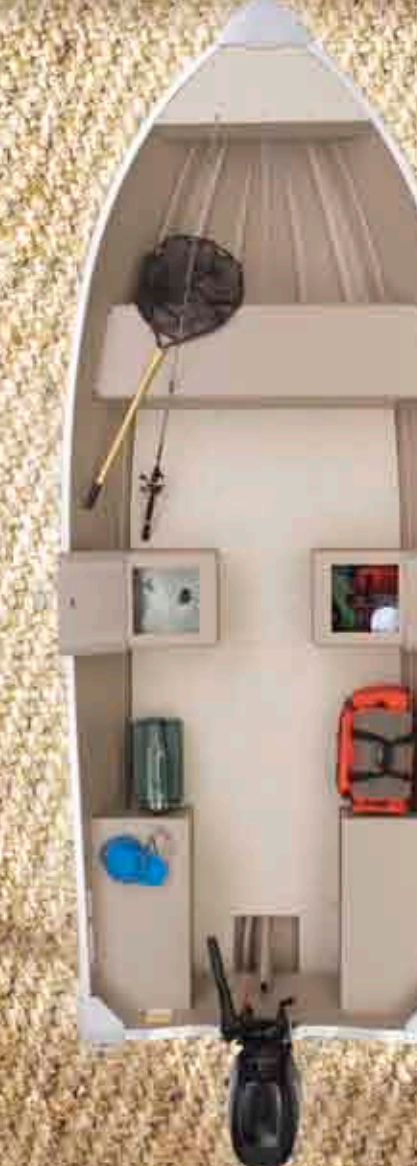

A1667
Length: 16'
Beam: 67"



A1667WT
Length: 16'
Beam: 67"

